

 Wayne®

# Whax Wax

## High Speed Stripper

The four features you need in a stripper...  
in a convenient 1 quart bottle!

1

**Convience and Cost control ...** Wayne Whax Wax is so concentrated a single quart makes five gallons of aggressive stripping solution. Just fill the bucket to the five gallon mark, add one quart of Whax Wax and you're ready to go to work. No measuring, no glugs, no guesswork ... just the right solution every time. And, quart bottles require less storage space, are easier to transport to the job site and safer to handle than unwieldy five gallon pails.

2


**Strips multiple coats with one application ...** Fast acting, dual solvent formulation strips up to twenty coats of high solids finish with a single application. Even strips acrylic seals and hard burnished build-ups without time consuming rescrubs.

3

**Safer to use ...** Low odor formula reduces user discomfort while generating less harmful V.O.C.'s than many conventional strippers. Formulated without dangerous caustic or silicates, Whax Wax has a lower pH that improves operator safety and allows use on stone and marble flooring.

4

**Unmatched economy ...** Wayne Whax Wax has over 95% active ingredients ... two or three times more concentrated than most premium strippers. At 19-1, maximum strength dilution, Whax Wax use cost is typically 20-30% less than competitive products. Time saved by one pass stripping efficiency and the elimination of a neutralizer rinse required when using caustic strippers make Whax Wax a smart choice for the stripping crew and the business manager.

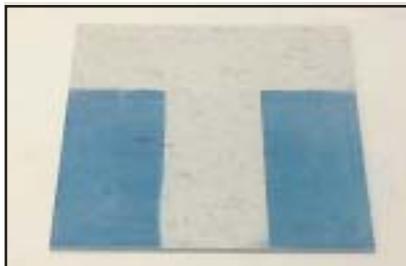


**Unretouched photo shows Wayne Whax Wax strips 20 coats ...  
without agitation in 10 minutes, at a 19-1 dilution.**

Manufactured by:


Wayne Concept Manufacturing Co., Inc.  
Fort Wayne, IN 46825      260-482-8615

# Whax Wax works. Watch!

①

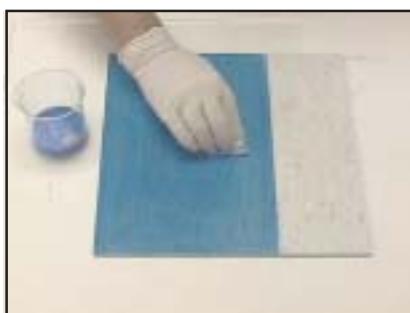

②

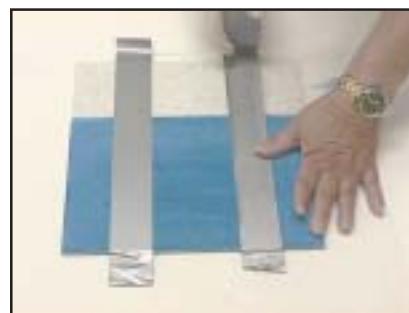

A 12" x 12" test tile is prepared by coating 2/3 of a beige/white tile with 24% finish infused with blue indicator dye. The 20 coats were applied over a 5 day period.

Chemical resistant tape is applied to protect outer edges of coated tile.

③



④




A 19-1 solution of Whax Wax and water is applied over exposed area. After 5 minutes more solution is added. No agitation.

After 10 minutes solution is squeegeed from the tile.

⑤



⑥

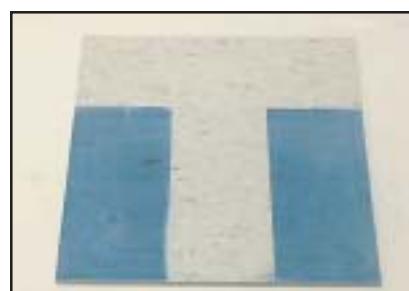

Area is wiped with a wet cloth and allowed to dry after protective tape is removed.

Finish is removed.